


# Product Specifications

## FlashLink Prime In-Transit Logger



Measurement Range	-40°F to 122°F (-40°C to 50°C)
Temperature Resolution	0.1°F/°C
Temperature Accuracy	±1.0°F from 14°F to 77°F (±0.5°C from -10°C to 25°C); ±2.0°F above 77°F (±1.0°C above 25°C) ±2.0°F below 14°F (±1.0°C below -10°C)
Data Capacity	3823 points
Data Download Time	5 seconds typical for 3823 points
Factory Programmed Setting	Delay start 60 minutes
Battery	Coin Cell Lithium Battery
Logger Dimensions	1.962 in x 3.423 in x .575 in (50 mm x 87 mm x 15 mm)
Casing	ABS plastic
Logger Weight	1.6 oz. (45.36 grams)
Shock Resistance	Withstands 3-foot (1 meter) drop to hard surface
Certification	CE Mark, NIST traceable, ROHS Compliant
Display	LCD
IP Rating	IP56
Storage conditions	-4°F to 122°F (-20°C to 50°C) 0% to 95% RH w/o condensation
System Requirements	Windows PC with current operating system, Adobe Reader, FlashPDF software
Download Requirements	8-Pin to USB Adapter

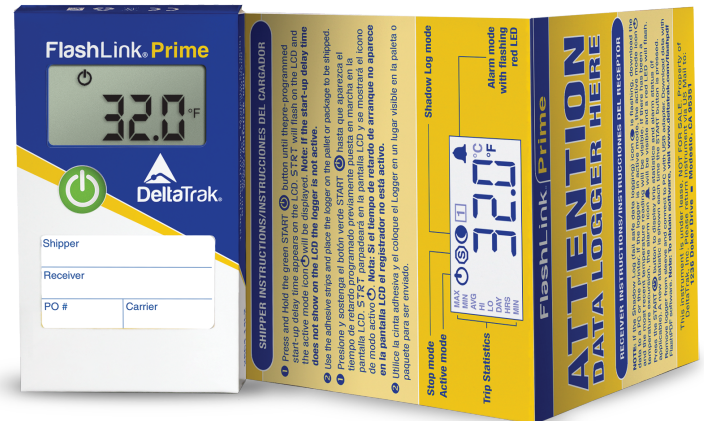

Models	15-Day	45-Day
°F Models	20881	30082

- Prime Services Include
  - ▶ Priority shipping, same day ordered
  - ▶ Post trip calibration service
  - ▶ Access to trip reports on ColdTrak Data Central cloud-based service
  - ▶ No charge for replacement loggers
- Accepted by most receivers
- Consolidate logger inventory with one brand for all shipments
- Mounted on high-visibility locator card
- Trip history statistics available on LCD
- Patented Shadow Log feature guarantees data even if the operator fails to start the unit
- Download data to PC as secure PDF report or print chart using CT Graphics printer

Patent No. 6,088, 514

DeltaTrak manufactures products under an ISO 9001:2008 registered quality management system

SS 20881-30082 18F1

